



1. Intel® LGA1151 Socket Core i3, i5, i7 & Pentium Processors (max. 65W)
2. Intel H110 Express Chipset
3. Support Dual Channel DDR4 2133MHz, 2 \* SO-DIMM slot, up to 32GB memory
4. Realtek ALC662 6-Channel HD Audio
5. 2 \* Realtek Giga LAN
6. Support 2 \* SATA 3.0 (6Gb/s), 1 \* mPCIe/mSATA and 1 \* M.2 M key-2242, 2260
7. Support HDMI/DP/eDP, dual displays
8. 4 \* External RS232 and 2 \* internal COM (COM1 supports RS232/422/485)
9. 4 \* External USB3.0 & 4 \* Internal USB1.1/2.0
10. 1 \* PCIe x16 slot
11. 1 \* SIM Card Holder

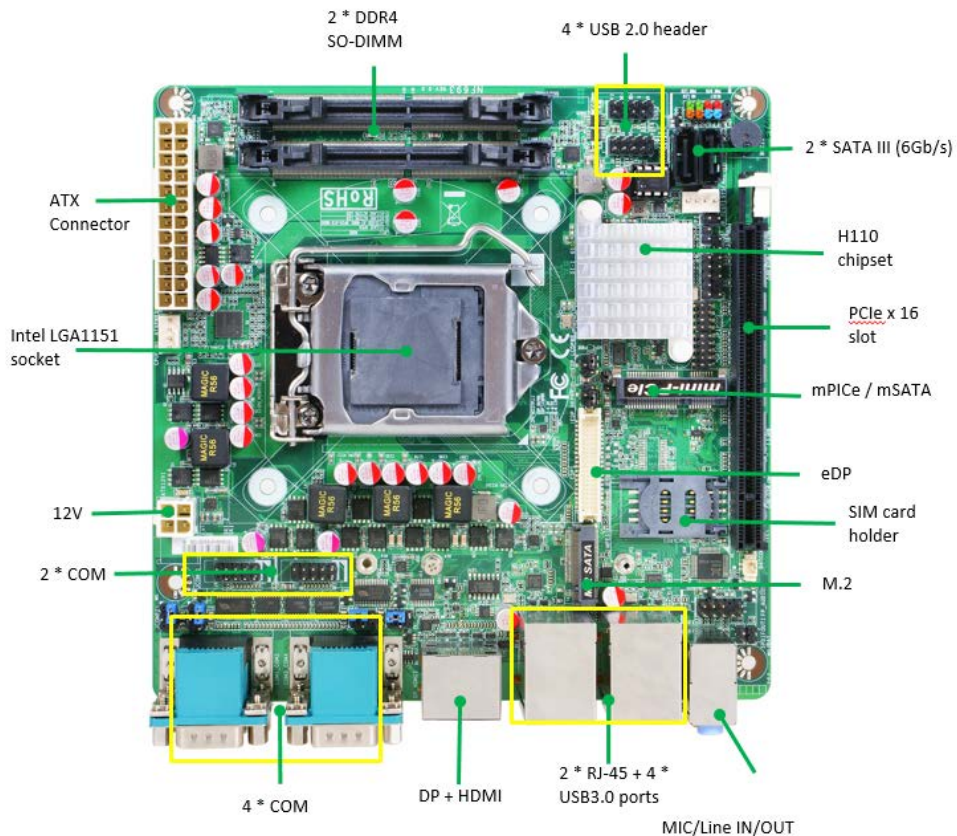

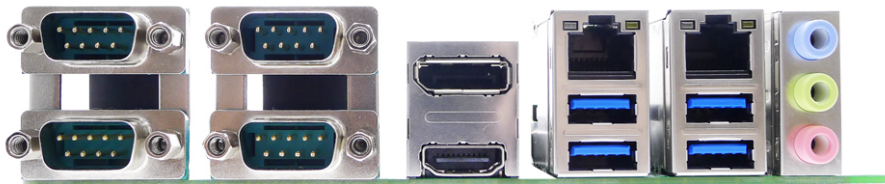



<b>Product Specifications</b>	
<b>Form Factor</b>	
Dimensions	- Mini-ITX (6.7-in * 6.7-in, 170 * 170mm)
<b>Processor System</b>	
CPU	- Intel LGA 1151 Socket Core i7 / i5 / i3 & Pentium Processors
Core Number	- (By CPU)
Max Speed	- (By CPU)
L2 Cache	- (By CPU)
Chipset	- Intel H110 Chipset
BIOS	- AMI 64Mb Flash ROM
<b>Expansion Slot</b>	
Mini-PCIe	- 1 (full size, co-lay with mSATA)
mSATA	- 1 (full size, co-lay with mini-PCIe)
M.2	- 1 (M key-2242, 2260)
PCIe	- 1 * PCIe x16
SIM card holder	- 1
<b>Memory</b>	
Technology	- Dual Channel DDR4 2133MHz
Max.	- 32GB
Socket	- 2 * SO-DIMM
<b>Graphics</b>	
Controller	- Intel® Gen9 Graphics supports DX 11/12, OGL4.3 / 4.4
VRAM	- Shared Memory
VGA	- 0
DVI-D	- 0
HDMI	- 1 (Max. Resolution : 3840*2160@24Hz)
DP	- 1 (Max. Resolution : 4096*2304@60Hz)
eDP	- 1 (Max. Resolution : 4096*2304@60Hz)
MultiDisplay	- Dual Display
<b>Ethernet</b>	
Ethernet	- 10/100/1000 Mbps
Controller	- PCIe GbE LAN : Realtek RTL8111G
Connector	- 2 * RJ 45
<b>Audio</b>	
CODEC	- HD Audio : Realtek ALC662
Channel	- 6 Channel
<b>SATA</b>	
Max Data Transfer Rate	- 2 * SATAIII (6.0Gb/s), 1 * mini-SATA III and 1 * M.2

RAID	- No
<b>Rear I/O</b>	
VGA	- 0
DP	- 1
HDMI	- 1
Ethernet	- 2
USB	- 4 * USB 3.0
Audio	- 3 (Line-In, Line-Out, MIC)
Serial	- 4 (COM1 support RS232/422/485 )
LED	- 0
DC-input	- 0
<b>Internal Connector</b>	
HDMI	- 0
USB	- 4 * USB 2.0
eDP	- 1
Serial	- 2 (COM5 is optional to support RS232/422/485)
SATA	- 2
mPCIe	- 1 (full size, co-lay with mSATA)
mSATA	- 1 (full size, co-lay with mPCIe)
M.2	- 1 (M key-2242, 2260)
SIM card holder	- 1
Chassis intrusion	- 1
PS/2	- 1
GPIO	- 1 (8 bit programmable inputs/outputs)
SMBUS/ I2C	- 1
Audio Header	- 1
TPM	- 1 (onboard option)
AT mode	- 1
<b>Watchdog Timer</b>	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments (10sec ~ 255min)
<b>Power Requirements</b>	
Input PWR	- 24 pin/4 pin ATX PWR Connector
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
Certifications	- CE, FCC, RoHS, REACH

Environment	
Temperature	- Operating: 0°C – 60°C
	- Storage: -20°C – 85°C

\*For further information please visit the website at <http://www.jetwayipc.com>

\*The Specification may be changed without further notice.

Product Accessories				
Parts	Manual	CD Driver	SATA cable	I/O Shield
P/N			G01-SATA3-BL-1F	
Q'ty			2	
Picture				

Product Application					
	Panel PC (工業平板電腦)	V	Medical (醫療)		POE/Surveillance (安防監控)
V	Commercial (商業應用)		POS/KIOSK (零售系統)	V	Power (電力系統)
V	Banking (銀行金控)	V	Industrial Automation (工業自動化)		Mobile (移動系統)
	Military (軍方應用)		Transportation (交通)		Storage(Nas) (存儲系統)
	Digital Signage (數字標牌)		Telecom (通訊)		I.O.T(物聯網)
	Gaming (博奕)		Networking (網絡應用)		AIO(一体机)