


E3800 SERIES

# SBC-211

## 3.5" SBC Motherboard

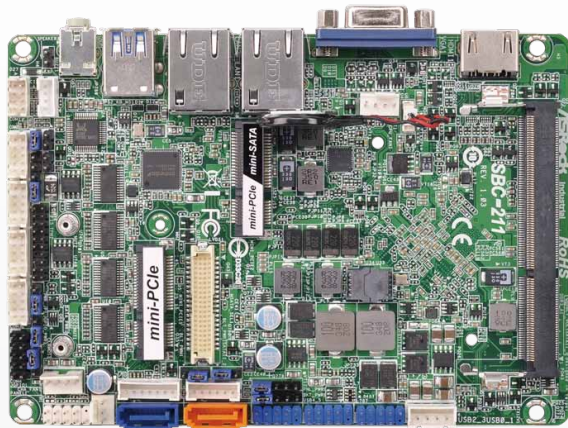

### Spotlight Features

- Intel® Atom™ Baytrail-E3800 Series Processor
- Integrated Intel® Gen7 Intel Graphics DX 11\*, OGL3.2
- Supports Single Channel DDR3L 1333MHz, 1 x SO-DIMM, up to 4GB system memory
- 1x HDMI, 1 x D-Sub, 1 x Dual Channel 24-bit LVDS
- 2xUSB 3.0, 6 x USB 2.0, 2 x SATA2
- 1 x mini-PCIe, 1x mSATA(shared)
- Gigabit LAN : 2 x Realtek Lan
- 1 x TPM Header
- 9~36 V DC-in

### Specifications

Processor System	
Dimension	3.5" SBC (5.8-in x 4.0-in)/ ( 146 x 102 mm)
CPU	Intel® new Atom™ Baytrail-E3800 Series Supports Hyper-Threading Technology Default E3826 Dual core processor
Core Number	(By CPU, Max 4)
Max Speed	(By CPU)
L2 Cache	(By CPU)
Chipset	(By CPU)
BIOS	UEFI
Expansion Slot	
PCI	0
Mini-PCIe	1 (Half Size) + 1 (Full Size ) shared with mSATA
mSATA	1 (Full Size ) shared with SATA2
PCIe	0
CFast Card Socket	0
Memory	
Technology	Single Channel DDR3L 1333 MHz SDRAM
Max.	4GB
Socket	1 x SO-DIMM
Graphics	
Controller	Intel® Gen7 Intel Graphics DX 11*, OGL3.2
VRAM	Shared Memory
VGA	Supports max. resolution 1920X1200
LVDS	Dual channel 24-bit, max resolution 1920 x 1200@60Hz
HDMI	Supports HDMI 1.4a, max resolution 1920x1200
DVI	No
Display Port	No
Multi Display	Yes (Dual Display)
Ethernet	
Interface	10/100/1000 Mbps
Controller	GbE LAN: Realtek RTL8111G-CG
Connector	2 x RJ-45
SATA	
Max Data Transfer Rate	SATA2 (3.0Gb/s)
Rear I/O	
VGA	1
HDMI	1
DVI-I/D	0
Display Port	0
Ethernet	2
USB	2 x USB 3.0 compliant
Audio	1 ( Line out)
Serial	0
e-SATA	0
PS/2	0
Internal Connector	
USB	6 ( 3*2.54 pitch header USB 2.0 compliant)
LVDS/Inverter	1/1
VGA	0
Serial	4 (RS-232)
SATA	2x SATA2 ( 3.0Gb/s)
m-SATA	1 (shared)
Mini-PCIe	1
Parallel	0
IrDA	0
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	1
Speaker Header	1
Watchdog Timer	
Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	9-36V DC-In using 4-pin ATX PWR Con
Power On	AT/ATX Supported AT : Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready
Environment	
Operating Temperature	0°C – 60°C