



JNF835-8365U

Intel® Whiskey Lake Series CPU, Support DDR4 up to 32GB, Multiple COM port, Type C USB3.1(Gen2), Dual LAN, Support Intel CNVi

1. Intel® Whiskey Lake-U i5-8365UE Processor (TDP 15W)
2. 2* DDR4 2400MHz SO-DIMM up to 32 GB
3. 2* 10/100/1000 Base-TX Ethernet Ports
4. 1* HDMI, 1* DP, 1* eDP, 1 * 24-bits Dual CH LVDS
5. 6* COM (COM1 support RS232/422/485), 4* USB3.1 Gen.2, 2* USB3.1 Gen.2 (Type C & Vertical type) & 3* USB2.0
6. 1* M.2 M-key (2242/2260/2280)support NVMe, 1* M.2 E-key (2230 w/ CNVi)
7. 1* SATA III (6Gb/s)
8. Support onboard TPM 2.0 (option)

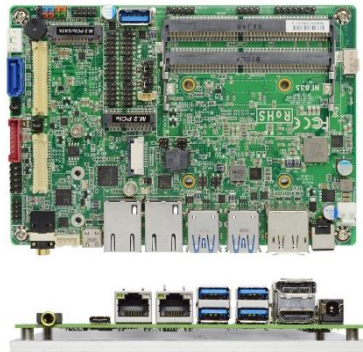


Overview

The JETWAY JNF835 is 3.5" form factor board adopts the Intel® Whiskey Lake-U i5-8365UE Processor. The board supports two SO-DIMM DDR4 2400Mhz memory, up to 32GB. Featuring the integrated Intel® Gigabit Ethernet controller, the JNF835 offers two 10/100/1000Base-TX Ethernet devices for network transmission. One SATAIII (6Gb/s) interface and one M.2 M-key offer storage devices. One four USB3.1 Gen.2 ports, two USB3.1 Gen.2 ports for Type C and Internal Vertical connector, three USB2.0 ports and six COM ports provide versatile expansion. The M.2 E-key can support WIFI/3G/4G and Intel CNVi interface. The JNF835 offers one HDMI1.4 port, one DP1.4 port, one eDP port and one 24-bits Dual CH LVDS which can support 3 independent displays. Because of the above features, JNF835 is suitable for Digital Signage, Industrial PCs, Factory Automation, IOT Solution applications.


Application

Digital Signage / Industrial PCs / Factory Automation /Retail Solution

I/O Diagram

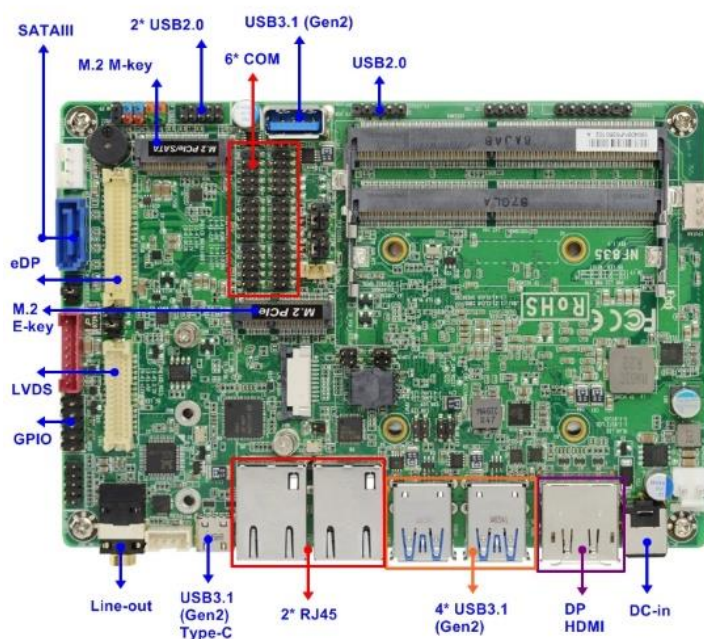

Mechanical Drawings (Unit = mm)

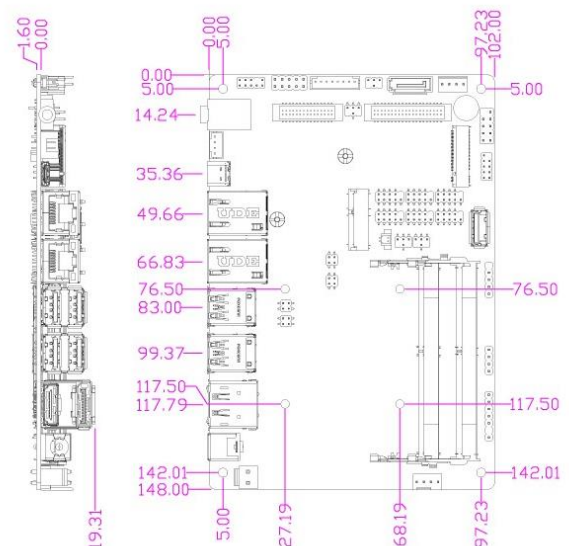

Specifications

Model	Form Factor
JNF835-8365U	3.5" (5.8-in * 4.0-in, 148 * 102mm)
Processor System	Expansion Slot
- Intel® Whiskey Lake-U i5-8365UE SoC Processor (TDP 15W) - AMI Flash ROM BIOS	- M.2 M-key (2242/2260/2280) Support PCIe4(NVMe) & SATA interface - M.2 E-key (2230) Support CNVi
Memory	Graphics
2* SO-DIMM DDR4 2400MHz Dual CH SDRAM non-ECC up to 32GB	- Intel® HD Graphics, shared memory 1* eDP (Max Resolution: 4096x2304@60Hz) 1* LVDS (Max Resolution: 1920x1200@60Hz) 1* HDMI 1.4 (Max Resolution: 4096x2160@30Hz) 1* DP (Max Resolution: 4096x2304@60Hz) - Support Triple Displays
Ethernet	Audio
2* Intel GbE (1* i219LM, 1* i211AT)	6 channel HD audio: Realtek ALC662VD 3W AMP speaker
SATA	Rear I/O
1* SATAIII	4* USB3.1(Gen2), 1* USB3.1(Gen2) Type C 1* DP 1* HDMI 2* Ethernet - Line-Out - DC-IN (9-24V)
Internal Connector	Watchdog Timer
1* USB3.1 (Gen2) Vertical conn, 3* USB 2.0 1* PS/2 1* LVDS / Inverter (selection w/eDP) 1* eDP (selection w/LVDS) 1* RS232/422/485, 5* RS232 1* SATAIII 1* GPIO (8 bit) 1* Chassis intrusion 1* Audio Header 1* SMBUS 1* AT mode - Support onboard TPM2.0(option)	- From Super I/O to drag RESETCON# 256 segments (10sec ~ 255min)
Power	Compliance
DC-IN 9-24V - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready	CE, FCC, LVD, RoHS, REACH
Temperature	Warranty
- Operating: 0°C ~ 60°C - Storage: -20°C ~ 85°C	2 Years Limited Warranty

* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.

Accessories

Parts Number	Description	Parts Number	Description
-----	JNF835 M/B		