



Features /

- 24" Marine Panel PC
- 8th Gen. Intel Core i3/i5 Processors
- 1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz

24" 8th Gen. Intel Core i3/i5 Marine Panel PC

- True Flat Bezel Design
- IP66 Front Panel
- Aluminum Enclosure (with Anti-Corrosion Coating)
- DC 24V Power Input with Isolated
- IEC 60945 Marine Certification

Specifications /



System	
CPU	Intel Core i3-8145UE (2C/4T,2.2GHz,15W TDP) Intel Core i5-8365UE (4C/8T,1.6GHz,15W TDP)
System Chipset	SoC
Memory	1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz
TPM	TPM 2.0

System Chipset	SoC
Memory	1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz
TPM	TPM 2.0
IO Port	
USB	4 x USB 3.0 type A
Serial/Parallel	1 x RS-232 (COM1, 5-pin terminal block) 1 x RS-232/422/485 Selectable Default RS-485 (COM 2, 5-pin terminal block) 1 x Display Port 1 x Line-out, Phone Jack 1 x ESD Ground
LAN	2 x GbE RJ-45
Power Connector	1 x 2-pin Terminal Block Connector (for remote power switch) 1 x 3-pin Terminal Block Connector
Front Side I/O	Keypad Capacitive Touch with LED Power Brightness+ Brightness- Brightness Mode Swap (DAY, DUSK, NIGHT) x Buzzer

Storage Space	
	Default: 1 x M.2 M-Key 2242(option 2280 can't use TB-528 at
Storage	same time)
	1 x 2.5" HDD space (option)

Expansion	
On board expansion bus	1 x TB-528 Expansion Connector (for 19"/24" only) option TB-528C2I for Isolation 2 x RS-422/485 Isolation


Display	
Display Type	24" TFT-LCD
Max. Resolution	1920 x 1080
Max. Color	16.7M
Luminance (cd/m²)	300
View Angle (H/V)	178(H)/178(V)
Contrast	3000:1
Backlight Lifetime	50,000 hrs

Touch	Screen
Typo	

Type	Projected Capacitive Touch
Interfece	LICD

Light Transmission(%) 90%

Dimensions /

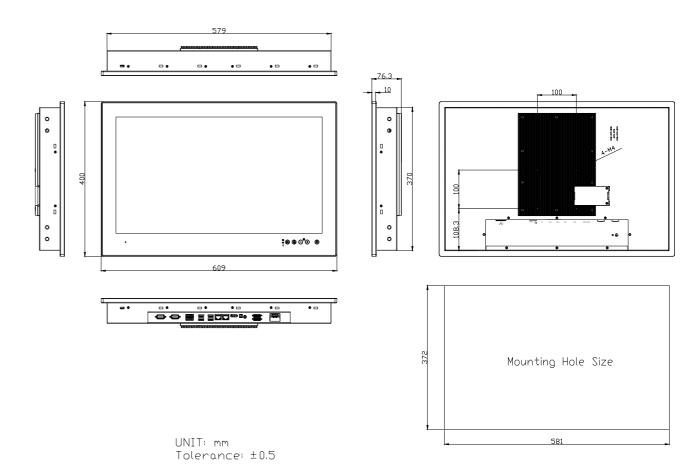

Power Input	DC 24V with Isolated / AC Power option
Power Consumption	ViKING-924BPH : 70W (Max)
Mechanical	
Construction	Black/ Aluminum Bezel and Aluminum Housing (Anti-Corrosion Coating)
Mounting	Panel Mount/ VESA Mount Front Access Mount / Mounting Bracket (option)
Dimensions	609 x 400 x 76.3 mm
Net Weight	7.8 kg
Environmental	
Operating Temperature	0~50°C (WT1: -20~60°C for optional)
Storage Temperature	-30~70°C
Humidity	10 to 90% @ 40°C, non-condensing
IP Rating	Front Panel IP66
Certificate	CE/FCC/IEC 60945

Windows 10, Windows 11

V 1.1