


# IMB-1008J

## Mini-ITX Motherboard

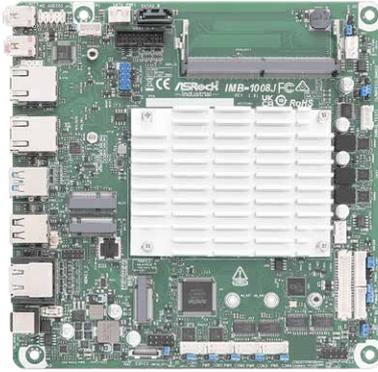

### KEY FEATURES

- Intel® Alder Lake-N SoC Processors
- 1 x 262-pin SO-DIMM DDR5 4800 MHz, up to 32GB
- 2 x USB 3.2 Gen2, 2 x USB 3.2 Gen1, 4 x USB 2.0, 1 x M.2 Key E, 2 x M.2 Key M, 4~6 x COM (Optional:COM5,COM6), 1 x SATA3
- 2 x Realtek Gigabit LAN
- Supports Triple display, 2 x HDMI 2.0b, 1 x LVDS or eDP
- 12V DC-In

### SPECIFICATIONS

#### Form Factor

Dimensions	Mini-ITX (6.7-in x 6.7-in x 0.86-in, 17.0 cm x 17.0 cm x 2.2 cm)
------------	--

#### Processor System

CPU	Intel® Alder Lake-N SoC Processors
BIOS	IMB-1008J (N97, QC, Max Speed Up to 3.6GHz, 12W) AMI SPI 256 Mbit

#### Memory

Technology	Single Channel DDR5 4800 MHz
Capacity	32GB
Socket	1 x 262-pin SO-DIMM

#### Graphics

Controller	Intel® UHD Graphics
HDMI	HDMI 2.0b Max resolution up to 4096 x 2160@60Hz
LVDS	Dual channel 24 bit up to 1920 x 1200@60Hz (Connector shared with eDP)
eDP	Max resolution up to 1920 x 1080@60Hz (Connector shared with LVDS)
MultiDisplay	Triple Display

#### Expansion Slot

M.2	1 x M.2 (Key E, 2230) with CNVi for Wireless
-----	--

#### Audio

Interface	Realtek ALC897 HD, High Definition Audio.Mic-in, Line-out
-----------	---

#### Ethernet

Controller/ Speed	Realtek RTL8111H with 10/100/1000 Mbps
Connector	2 x RJ-45

#### Rear I/O

HDMI	2 x HDMI 2.0b
Ethernet	2 x 1 Gigabit LAN
USB	2 x USB 3.2 Gen2 2 x USB 2.0
Audio	2 (Mic-In, Line-Out)

#### Internal Connector

USB	2 x USB 3.2 Gen1 (1 x USB 3.1 header) 2 x USB 2.0 (1 x 2.54 pitch header)
COM	COM1, COM2 (RS-232/422/485) COM3, COM4 (RS-232) COM5, COM6 (RS-232)(Optional)
GPIO	4 x GPI, 4 x GPO
LVDS	1 (Connector with LVDS/eDP signal, switch by BIOS)
SATA PWR Output	1
Speaker Header	1

#### Security

TPM	TPM Header
-----	------------

#### Storage

M.2	1 x M.2 (Key M, 2242/2280) with PCIe Gen3 x1 or SATA3 for SSD (M2_M1) 1 x M.2 (Key M, 2242/2260/2280) with PCIe Gen3 x1 and USB 2.0 (M2_M2) <small>*M2M-M2B Card can support on M2_M2 for Key B (3042/3052) with SIM Socket</small>
SATA	1 x SATA3 (6Gb/s)

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

#### Power Requirements

Input PWR	12V DC-In
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

#### Environment

Operating Temp	-20°C ~ 70°C
Storage Temp	-40°C ~ 85°C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%