


MF04-03 / MF04-07

Intel® Elkhart Lake J6412 CPU, DDR4 up to 32GB, 2 HDMI2.0b, 1* M.2 (M-key), 1* M.2 (E-key), 1* M.2 (B-key) W/SIM card slot, 32GB eMMC (default), 1* 2.5GbE, 1* GbE, 12~24V DC-in*

1. Intel® Elkhart Lake SoC Processor
2. 2* DDR4 3200MHz SO-DIMM up to 32GB
3. 1* Intel i211AT GbE, 1* Intel i225LM 2.5GbE
4. 2* HDMI2.0b, 1* eDP (co-layout LVDS)
5. 2* COM, 3* USB3.1 (Gen.2), 5* USB2.0
6. 1* M.2 E-key 2230, 1* M.2 B-key 3042 W/SIM card slot
7. 1* M.2 M-key 2242/2280, 1* SATAIII (6Gb/s); 32GB eMMC (default)
8. Support 12~24V DC-in

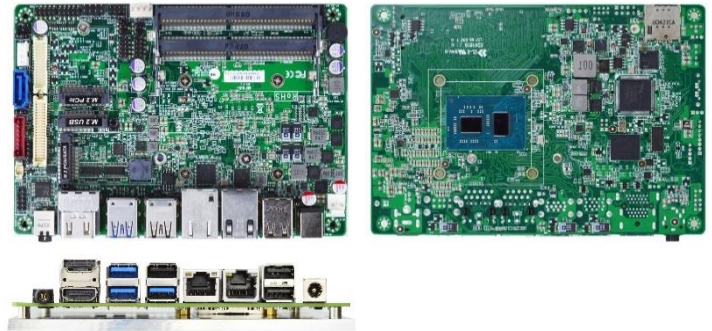



Overview

The JETWAY MF04-03/MF04-07 is 3.5" form factor board adopts the Intel® Elkhart Lake J6412 SoC Processor. The board supports two SO-DIMM DDR4 3200MHz memory, up to 32GB. Featuring the integrated Intel® Gigabit Ethernet controller, the MF04-03/MF04-07 offers one 10/100/1000Base-TX Ethernet device & one 10/100/1000/2500Base-TX Ethernet device for network transmission. One SATAIII (6Gb/s) interface, one M.2 M-key and 32GB onboard eMMC (default) offer storage devices. Three USB3.1 Gen.2 ports, Five USB2.0 ports and two COM ports provide versatile expansion. The M.2 B-key 3042 can support 3G/4G/LTE card. The MF04-03/MF04-07 offers two HDMI2.0b ports and one LVDS (co-layout eDP). Because of the above features, MF04-03/MF04-07 is suitable for Panel PC, IOT Solution, Edge computing applications.

Application

Panel PC / IOT Solution / Edge computing

I/O Diagram

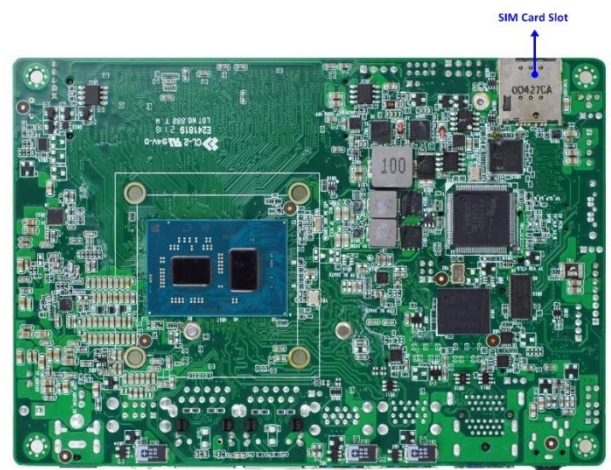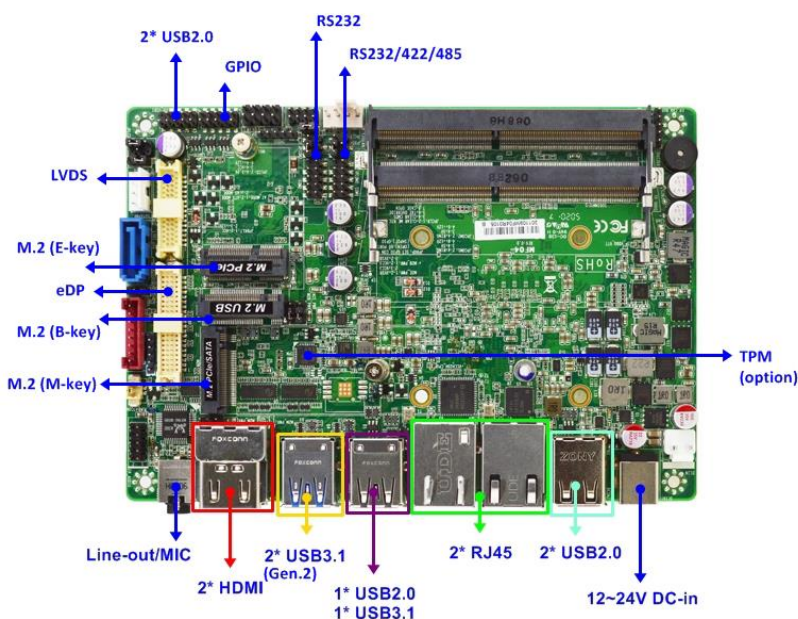

Specifications

Model	Form Factor
- MF04-03 (J6412 CPU_10W, 32GB eMMC) - MF04-07 (J6412 CPU_10W, 32GB eMMC, W/TPM2.0)	3.5" (5.8-in * 4.0-in, 148 * 102mm)
Processor System	Expansion Slot
- Intel® Elkhart Lake J6412 SoC Processor (TDP 10W) - AMI Flash ROM BIOS	1* M.2 B-key (3042) Support USB3.1/USB2.0 interface W/SIM card slot 1* M.2 E-key (2230) Support USB2.0/PCIe Gen.3 x1 interface
Memory	Graphics
2* SO-DIMM DDR4 3200MHz SDRAM up to 32GB	- Intel® HD Graphics, shared memory 1* eDP (Max Resolution: 4096x2160@60Hz) 1* LVDS (Max Resolution: 1920x1080@60Hz) 2* HDMI2.0b (Max Resolution: 4096x2160@60Hz)
Ethernet	Audio
1* Intel® i211AT GbE 1* Intel® i225LM 2.5GbE	2 channel HD audio: Realtek® ALC662
Storage	Integrated Storage
1* SATAIII 32GB onboard eMMC (default) 1* M.2 M-key (2242/2280) PCIe Gen.3 x2/SATA interface Support NVME	N/A
Rear I/O	Internal Connector
3* USB3.1 (Gen.2), 3* USB2.0 2* HDMI 2* RJ45 - Line-out/MIC combo jack - DC-in (12~24V)	2* USB2.0 1* eDP (co-layout LVDS) 1* LVDS w/ Inverter 1* RS232, 1* RS232/422/485 1* SATAIII 1* SIM card slot (along with M.2 B-key) 1* GPIO (8 bit) 1* Audio Header 1* SMBUS 1* CPU FAN 1* TPM2.0 onboard (MF04-07)
Watchdog Timer	Power
- From Super I/O to drag RESETCON# 256 segments (10sec ~ 255min)	DC-IN 12~24V AT/ATX Supported - AT: Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Compliance	Temperature
CE, FCC, LVD, RoHS, REACH	- Operating: 0°C ~ 60°C - Storage: -40°C ~ 85°C - Humidity: 10% ~ 90% RH @40°C (non-condensing)
Warranty	
2 Years Limited Warranty	

* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.

Accessories

Parts Number	Description	Parts Number	Description
-----	MF04-03/MF04-07 Series M/B		

