




### Features

- Mobile Intel® Whiskey Lake Core i CPU
- Medical Latest IEC 60601-1 & 60601-1-2 Certifications (MDR)
- 21.5" FHD MVA Diagnostic Panel w/ P-Cap Multi-Touch
- Optional Hot-Swappable Batteries X3
- Fanless Design with Reliable Thermal Solution
- Dual storage M.2 NVMe SSD & 2.5" drive (w/ doggy door)
- Hospital White Plastic Housing w/ Anti-bacteria Treatment
- Battery Charger Station, 4KV Isolated I/O kit, DICOM GSDF Calibration & More Options for Diversified Applications
- Support PCIe4 Expansion Slot
- Optional DICOM Part 14 Module



### Specification

Model	WMP 22J IP0A (STD)		WMP 22J IP0B (ISO)	
CPU / Chipset	FCBGA1528 Intel® Whiskey Lake Core i7/i5 processor (15W Max.) / SoC Optional Vpro by Core i7/i5 CPU			
Graphic	Intel® integrated UHD Graphics 620			
RAM	Two DDR4 Dual-2400MHz RAM, non-ECC, x2 SO-DIMM socket, up to 64GB			
OS Support	Optional Win 10 IoT Enterprise			
Storage	1 x M.2 NVMe SSD (M Key 2242/2260/2280) PCIe4, 1 x 2.5" SSD/HDD w/ doggy door			
Expansion	1 x PCIe4, 1 x M.2 E Key Optional Network Interface: 802.11 ac/a/b/g/n (or Wifi-6) WLAN + Bluetooth module			
Display Size	21.5" wide TFT-Color LCD (16:9)			
Display	Option 1	1920 x 1080 (Full HD), 16.7M colors (True, 8 bit), 178(H) / 178(V), 250 nits (Typ. Center point), CR:3000 : 1 (Typ)		
	Option 2	1920 x 1080 (Full HD), 16.7M colors (True, 8 bit), 178(H) / 178(V), 250 nits (Typ. Center point), CR:1000 : 1 (Typ)		
Touch Screen	Full flat projective capacitive touch panel / Light Transmission: 90% ± 3% / Hardness: 7H pencil, pressure 750g/45° / Life: 100M times			
USB	4 x USB3.1 gen II		4 x USB3.1 gen II, 1 x ISO USB2.0	
COM	1 x RS-232, 1 x RS232/RS422/RS485		1 x ISO RS-232, 1 x ISO RS232/RS422/RS485	
LAN	2 x Gigabit RJ45		2 x Gigabit RJ45, 1 x ISO Gigabit RJ45	
Audio/ Video	Line-out & Microphone-in (3.5mm phone jack) / 1 x DP & 1 x HDMI video-in			
Speakers & Microphone	2x 2-watt speakers & integrated microphone (at housing bottom side)			
Reading light	2 x Light Bar (at housing bottom side)			
Control Hot Key (R to L)	Battery LED Indicator, Power On/Off, Volume +/-, Brightness +/-, Reading Light, LCD Backlight On/Off, Touch & Hot Key Enable/Disable, Function Key			
Cooling	Fanless Design with External Heatsink			
Battery Pack	Optional 3 x DR-202 Series, Lithium-ion Battery w/ Hot-Swappable Design			
Power Input / Consumption	DC-In x 1, DC 14-24V input			
Power Adapter	AC input 100~240V / 47 ~ 63 Hz / DC output 18V, 100W (Optional 180W)			
Temperature	Operating Temperature: 0~40°C (chamber) / Storage Temperature: -20~60°C			
Humidity	Operating & Storage: 10 ~ 90%, non-condensing			
IP Rating / Housing	IP65 (Front Side), IPX1 for whole system / Front: Full flat design / Touch (standard)/ Glass( customized); Rear: Plastic White w/Anti-bacteria (MRSA) Housing			
Dimensions (Net)	541.0mm (H) x 352.9mm (V) x 56.0mm (T)			
Weights (Net)	7.0 kg (w/o power adapter/battery pack), 8.5 kg (w/ x3 battery pack & no power adaptor)			
Mounting	VESA 100 x 100			
Certification	MDR (2017/745), UL/cUL60601-1:2014 (V3.1)/, FCC/CE(60601-1-2: 2015(V4.0)/VCCI Class B			

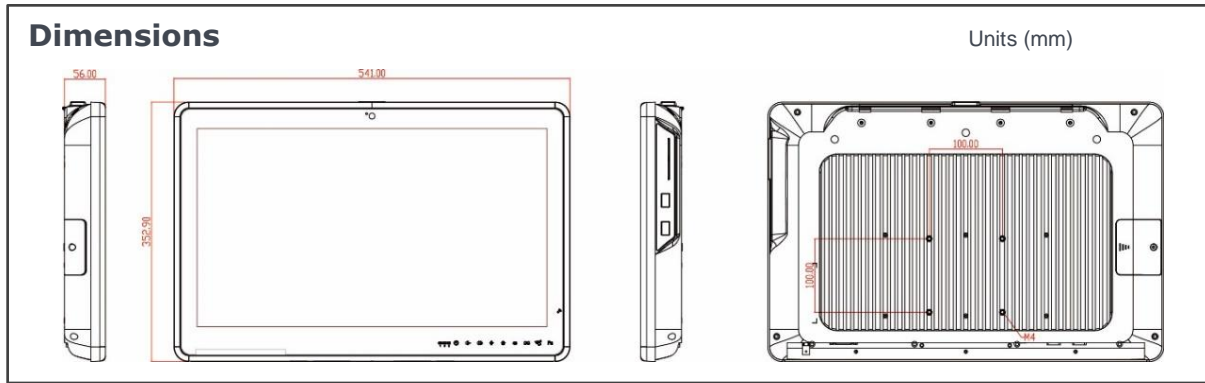


### Major Options & Customization

Battery & Charger	<ul style="list-style-type: none"> <li>① Battery Pack: 3 x DR-202 Series, Lithium-ion Battery w/ Hot-Swappable Design</li> <li>② Battery Charger Station: JW202W2 3-Slot w/200W Power Adaptor</li> </ul>
Options	<ul style="list-style-type: none"> <li>① 5MP Auto Focus Webcam</li> <li>② TPM 2.0 module</li> <li>③ Smart Card Reader at side or CAC / PIV Reader (FIPS-201) (different rear housing)</li> <li>④ RFID Reader (13.56MHz)</li> <li>⑤ AG Film</li> <li>⑥ Wifi WLAN + Bluetooth w/ 2x antenna</li> <li>⑦ M.2 NVMe SSD</li> <li>⑧ SATA III 2.5" HDD module</li> <li>⑨ Equipotential Terminal Pin</li> <li>⑩ Full HD Capture Card or 4K SC710N1 12G SDI Capture Card</li> <li>⑪ USB 2.0 x 2 at Side (different rear housing)</li> <li>⑫ 5V1A Power Jack (for Standard Type)</li> <li>⑬ Light Sensor for Auto Brightness (can't co-exist with webcam)</li> <li>⑭ DICOM Part 14 Compliance</li> <li>⑮ DC-DC Extension Cable (2 meter)</li> <li>⑯ I/O Cover (for better cables management)</li> <li>⑰ White Color Metal Desktop Stand w/ Anti-bacterial Treatment</li> </ul>
Customization	<ul style="list-style-type: none"> <li>① Tempered Glass</li> <li>② Touch Panel with Anti-glare Coating</li> <li>③ COM Ports Support 5V1A Output</li> </ul>

### Order Information

Item	Configuration
WMP-22J-IP0A-i5	Core i5-8365UE 1.60GHz / 4G RAM / M.2 128G SSD / Full flat P.cap touch / Support Vpro
WMP-22J-IP0A-i7	Core i7-8665UE 1.80GHz / 4G RAM / M.2 128G SSD / Full flat P.cap touch / Support Vpro
WMP-22J-IP0B-i5	Core i5-8365UE 1.60GHz / 4G RAM / M.2 128G SSD / Full flat P.cap touch / ISO

### I/O ports (Standard type)

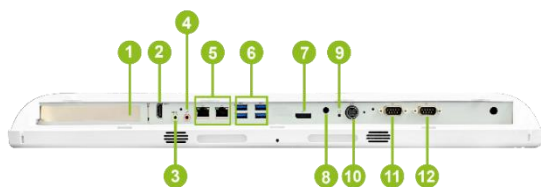

- ① PCI-E expansion
- ② Video-in
- ③ Line-out
- ④ Microphone-in
- ⑤ LAN x 2
- ⑥ USB3.1 gen II x 4
- ⑦ DP x 1
- ⑧ Equipotential Terminal Pin
- ⑨ Reset
- ⑩ DC-in
- ⑪ RS232/422/485
- ⑫ RS232

