

R15L600-67C3ST

15" IP67 Stainless Resistive Chassis Display



KEY FEATURES

- 15", 1024 x 768 IP67 Stainless Resistive Chassis Display
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP67 waterproof and dustproof



SPECIFICATIONS

Display			
Resolution	1024x768	Size	15 inches
Contrast Ratio	2000:1	Panel Brightness	300 nits
Display Color	16.2M Colors	View Angles	88,88,88,88
Active Area	304.1x228.1 mm	Touch / Glass	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)
Mechanical			
Dimension	383 x 310 x 57 mm	Mounting	VESA Mount Yoke Mount
Enclosure	Stainless Housing	Cooling System	Fanless design
Environment			
Operating Humidity	10% to 90% (non-condensing)	Operating Temperature	0~45℃
Storage Temperature	-20~60℃	IP rating	IP67
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x M12 waterproof connector for 12V DC	USB Port	1x M12 waterproof connector for touch screen control (Optional)
Serial Port	1 x M12 waterproof connector for touch screen control (Optional)	Video	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status		
Control			
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
Accessory			
Accessory	100~240V AC to DC Adapter with waterproof connector	Optional Accessory	Yoke mount stand (Optional) External HDMI cable with waterproof connector


Power Cord
 External VGA cable with waterproof connector
 Waterproof caps
 Manual
 VESA screws

(Optional)
 External DVI cable with waterproof connector
 (Optional)
 External USB cable with waterproof connector for
 touchscreen control (Optional)
 External RS232 cable with waterproof connector
 for touchscreen control (Optional)

Power	
Power Rating	12V DC (M12 type)

DIMENSIONS UNIT:MM

Winmate R15L600-67C3ST

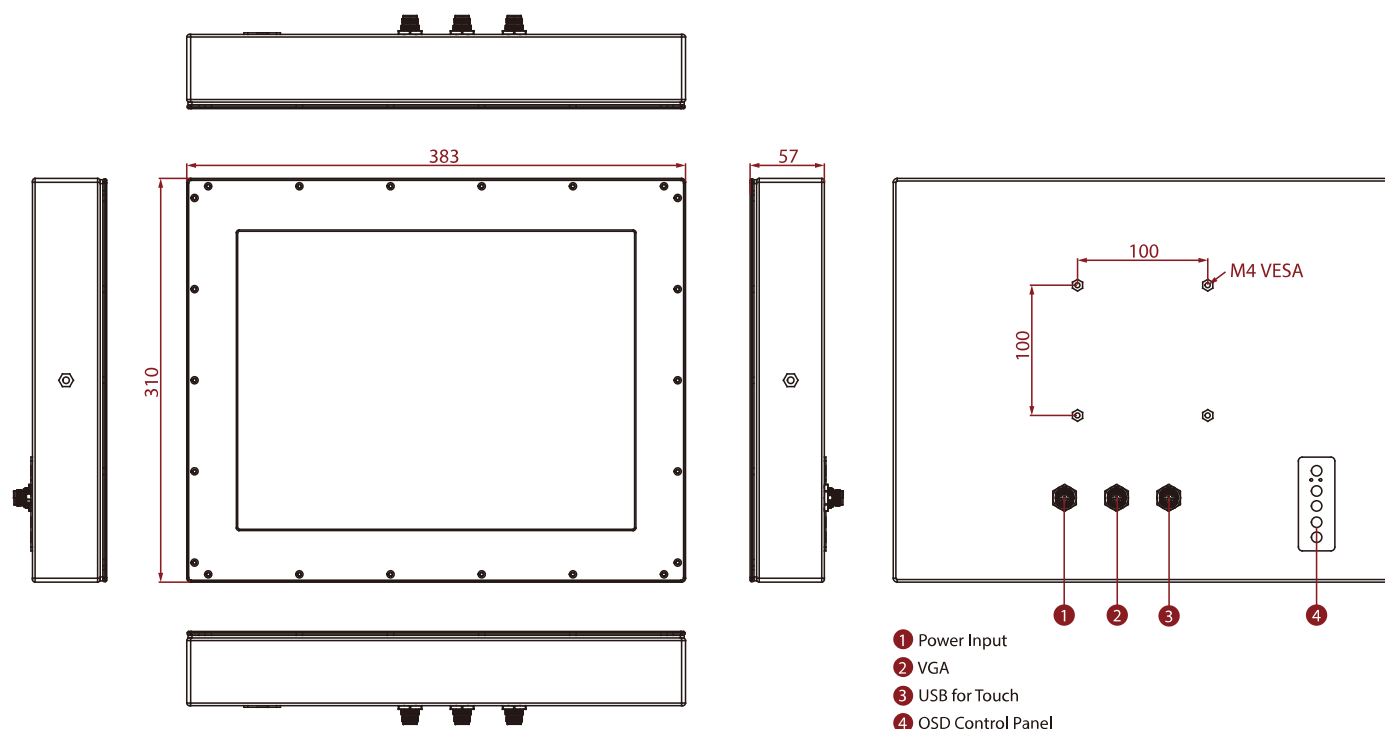

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.