

R17IAD7T-RKM1

17" Intel® Core™ i9/i7/i5/i3 (Alder Lake S) Rack Mount Panel PC



KEY FEATURES

- 17" 1280 x 1024 Resolution Rack Mount Panel PC
- 12th Gen Intel® Core™ Alder Lake S i9 / i7 / i5 / i3 processor
- 2 x SODIMM, DDR5 4800MHz, support up to 64GB (Max. 32GB for each slot)
- Integrated Dual 2.5 Gigabit Ethernet
- Multi display supports DP 1.4a / HDMI 2.0b (Optional)
- Multiple I/Os, 4 x USB 3.2 Gen2x1, 2 x Serial Ports
- 12 V DC Power input

INTRODUCTION

Winmate Rack Mount Panel PC Series offers robust computing performance in a space-efficient rack mount design, perfect for server rooms, industrial control systems, and data centers. Powered by Intel® processors and available in sizes from 15" to 19", these panel PCs feature high-resolution displays, multiple I/O options, and multi-display support for seamless integration. With flexible storage, dual Gigabit Ethernet, and durable construction, the series delivers reliable performance and versatility for demanding industrial and commercial applications.

SPECIFICATIONS

Display

Resolution	1280x1024	Size	17.0 inches
Contrast Ratio	1000:1	Panel Brightness	350.0 nits
View Angles	85,85,80,80	Active Area	337.920x270.336 mm
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)		

System Specification

WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Core™ i3-12100TE(up to 4.00GHz) (Default) Intel® Core™ i5-12500TE(up to 4.3GHz) (Optional) Intel® Core™ i7-12700TE(up to 4.6GHz) (Optional) Intel® Core™ i9-12900TE(up to 4.80GHz) (Optional) Intel® Core™ i3-14100T(up to 4.4GHz) (Optional) Intel® Core™ i5-14500T(up to 4.8GHz) (Optional) Intel® Core™ i7-14700T(up to 5.2GHz) (Optional) Intel® Core™ i9-14900T(up to 5.5GHz) (Optional)	Chipset	Intel® R680E
Memory	2 x non-ECC SO-DIMM RAM, up to 64GB (32GB per DIMM)	Storage	128GB SSD(Default) (Default) 256GB SSD (Optional) 512GB SSD (Optional) 1TB (Optional) 2TB (Optional) 4TB 2 x SATA III for 2.5" SSD/HDD up to 2TB(RAID Support) (Optional)
Ethernet controller	2 x Intel® Ethernet Controller	Security	TPM 2.0
Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional)		

Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional)

Mechanical

Dimension	482.6 x 399 x 92 mm	Weight	5.9 kg
Mounting	VESA mount (Default) Rack mount (9U) (Optional)	Enclosure	Metal Housing
Cooling System	Fan Design		

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		

Certification

Certification	CE, FCC
----------------------	---------

IO Ports

Power Input	1 x 12V DC, Din4 pin connector	USB Port	4 x USB 3.2 Gen2x1 (10Gbps, TypeA)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x DP1.4a DP++ , Max resolution up to 4096x2160@60Hz (Default) 1 x HDMI 2.0b , Max resolution up to 4096x2160@60Hz (Optional)
Audio	Mic in Line out	Expansion Port	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-Key Slot (for Wi-Fi module)
LAN	2 x 2.5 Giga LAN RJ45 Connector		

Control

Button	1 x Power Button 1 x Reset Button
---------------	--------------------------------------


Accessory

Accessory	100~240V AC to DC Adapter Power Cord VESA screws
------------------	--

Power

Power Rating	12V DC	Adapter	12V 220W
---------------------	--------	----------------	----------

DIMENSIONS UNIT:MM

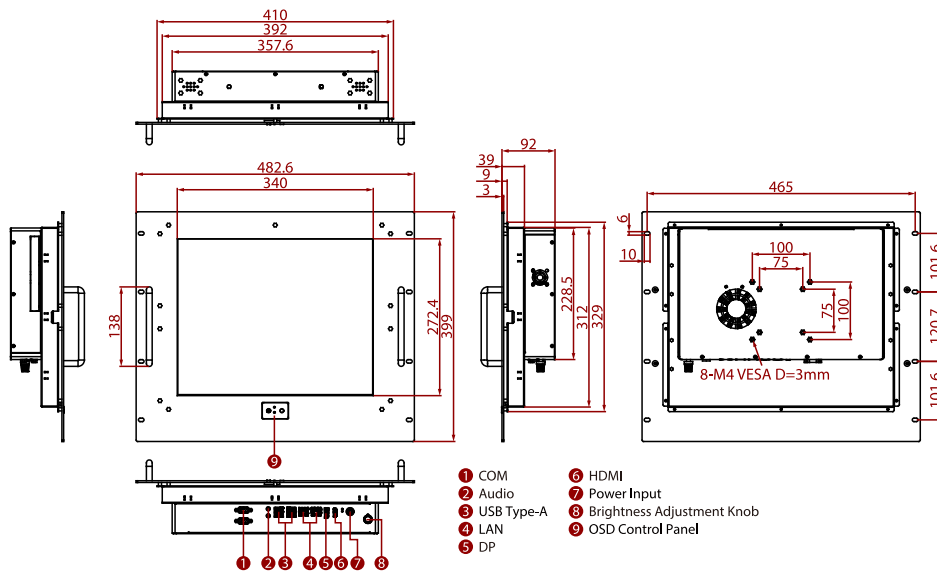

NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.