

W18IAD3S-RKA1

18.5" Intel® Core™ i5-1235U Rack Mount Panel PC



KEY FEATURES

- 18.5" 1920 x 1080 Resolution Rack Mount Panel PC
- 12th Gen Intel® Core™ i5-1235U processor
- 1 x SODIMM, DDR5 4800MHz, support up to 32GB
- Integrated Dual 2.5 Gigabit Ethernet
- Multiple I/Os, 2 x USB 3.2 Gen2x1, 2 x Serial Ports
- 12 V DC Power input

INTRODUCTION

Winmate Rack Mount Panel PC Series offers robust computing performance in a space-efficient rack mount design, perfect for server rooms, industrial control systems, and data centers. Powered by Intel® processors and available in sizes from 15" to 19", these panel PCs feature high-resolution displays, multiple I/O options, and multi-display support for seamless integration. With flexible storage, dual Gigabit Ethernet, and durable construction, the series delivers reliable performance and versatility for demanding industrial and commercial applications.

SPECIFICATIONS

Display

Resolution	1920x1080	Size	18.5 inches
Contrast Ratio	1000:1	Panel Brightness	350.0 nits
View Angles	89,89,89,89	Active Area	408.96x230.04 mm
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)		

System Specification

WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Core™ i5-1235U 3.3GHz(up to 4.40 GHz)	Memory	8GB(Default) (Default) 16GB (Optional) 32GB (Optional)
Storage	128GB SSD(Default) (Default) 256GB SSD (Optional) 512GB SSD (Optional) 1TB (Optional) 2TB (Optional) 4TB 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional)


Mechanical

Dimension	483 x 355 x 73 mm	Weight	5.9 kg
Mounting	Rack mount (8U)	Enclosure	Metal Housing
Cooling System	Fanless Design		

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x 12V DC, 2.5φ DC jack	USB Port	2 x USB3.2 Gen2x1 (Type-A)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x HDMI 2.0 (Optional)
Audio	2 x Speaker	Expansion Port	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-KeySlot (for Wi-Fi Module)
LAN	2 x 2.5 Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Brightness Knob	1 x Brightness Adjustment Knob		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord VESA screws		
Power			
Power Rating	12V DC	Adapter	12V 120W

DIMENSIONS UNIT:MM

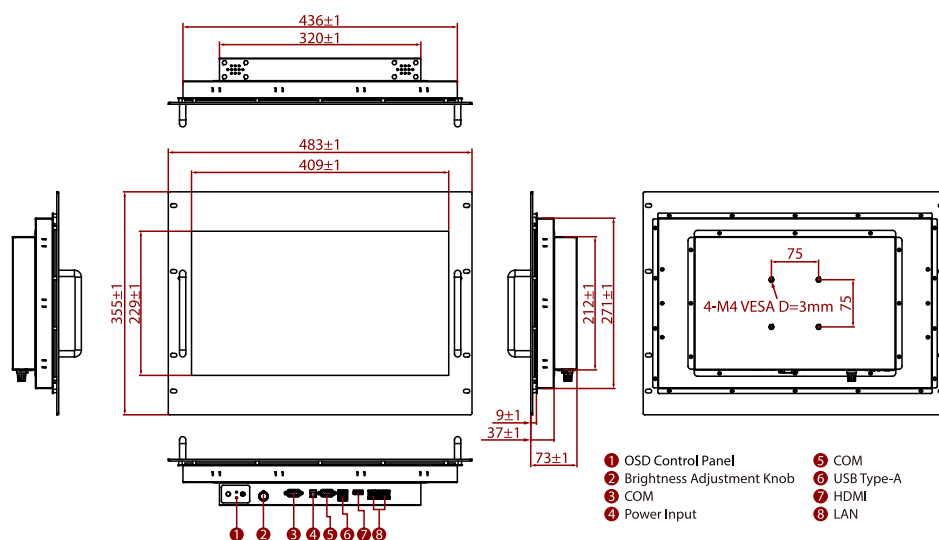

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.