

NIKY-2155-NX




15.6" Full HD 1920 x 1080 AI Panel PC with NVIDIA® Jetson Orin™ NX


Front View



Top View

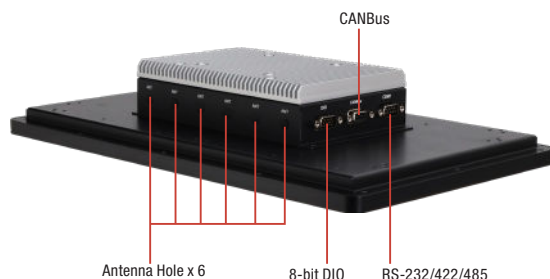

Bottom View

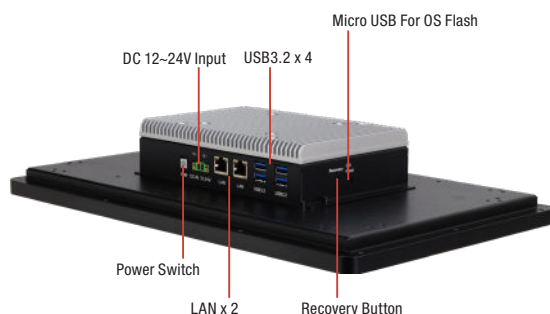

Features

- 15.6" FHD 1920x1080
- PCAP Touch
- NVIDIA® Jetson Orin™ NX
- 8GB LPDDR5
- M.2 E-Key x 1, M.2 B-Key x 1, M.2 M-Key x 1
- CANBus, DIO, COM Port
- GbE LAN x 2
- DC 12~24V




Specifications

System	
Processor	NVIDIA® Jetson Orin™ NX 6-core Arm® Cortex®-A78AE v8.2 64-bit CPU
System Memory	8GB LPDDR5
LCD/CRT controller	N/A
Ethernet	GbE LAN x 2
I/O Port	USB 3.2 Gen 2 (Type-A) x 4 GbE LAN x 2 Micro USB x 1 for OS Flash DB-9 x 1 for CANBus DB-9 x 1 for RS-232/422/485 DB-15 x 1 for 8-bit DIO Power ON/OFF Switch x 1 Recovery Button x 1 Antenna Hole x 6
Storage Disk Drive	M.2 2280 M-Key x 1 for Storage (Default: 128GB)
Expansion Slot	M.2 2230 E-Key x 1 M.2 3042/3052 B-Key x 1
OS support	Ubuntu 22.04
Mechanical	
Construction	Aluminum Front Bezel + Metal Chassis
Mounting	VESA 100 / Panel Mount
Dimension	15.2" x 9.3" x 2.6" (385.6mm x 235.0mm x 66.6mm)
Carton Dimension	20.3" x 15.2" x 7.8" (515mm x 385mm x 198mm)
Gross Weight	9.39 lb. (4.26Kg)
Environmental	
Operating Temperature	23°F ~ 131°F (-5°C ~ 55°C) with 0.7 m/s airflow
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Storage Humidity	90% @ 40°C, non-condensing
Vibration	1Grms / 5~ 500Hz / operation
Shock	15 G peak acceleration (11 msec. duration)
EMC	CE/FCC Class A
Power Supply	
DC Input	DC 12~24V
LCD	
Display Type	15.6" TFT-LCD, LED
Max Resolution	1920 (H) x 1080 (V)
Max. Colors	16.7M
Luminance	350 cd/m²
Viewing Angle	160° (H) / 160° (V)
Back Light	LED
Back Light MTBF (Hours)	35,000
Touchscreen	
Type	P-CAP
Light Transmission	>= 85%



Dimension

Unit: mm

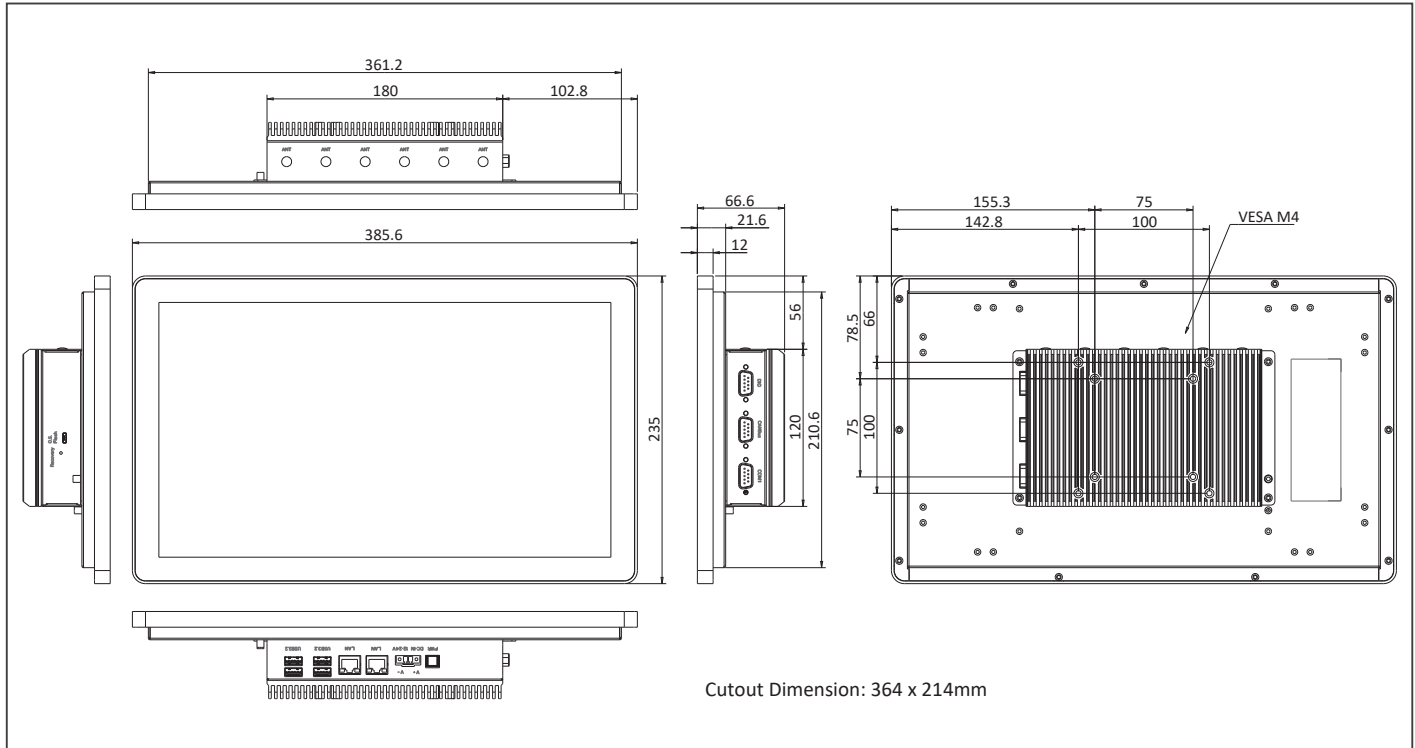

Packing List

- Phoenix Power Connector
- Screws
- NIKY-2155-NX

Optional Accessories

Part Number	Description
170X000799	Power Cord (US Type)
170X000800	Power Cord (European Type)
170X000803	Power Cord (Japanese Type)
1255300611	12V 60W Power Adapter

Ordering Information

Part Number	Display Type	Max Resolution	Luminance	View Angle	CPU	LAN	USB	RS-232/422/485	Storage	RAM	Display	Internal Expansion	Mounting	Power	Operating Temp.	Touch
NIKY-2155HTT-NX-A1-1010	15.6" TFT LCD	1920 (H) x 1080 (V)	350 cd/m ²	160° (H) / 160° (V)	NVIDIA® Jetson Orin™ NX	2	USB 3.2 Gen 2 x 4	1	M.2 2280 M-Key x 1 (Default: 128GB)	8GB	—	M.2 2230 E-Key x 1 M.2 3042/3052 B-Key x 1	VESA / Panel Mount	DC 12V ~ 24V	23°F ~ 131°F (-5°C ~ 55°C)	P-CAP