



HBJC909C9A


Intel® Coffee Lake-S Chip, Support LGA1151 CPU, DDR4 up to 32GB, Support 12~36V DC-in

1. Intel® LGA1151 Socket Core I3,I5,I7 Pentium Processor (Max 35W)
2. Intel® Coffee Lake-S H310 Chip
3. Support Dual Channel DDR4 2133MHz up to 32GB
4. Support MXM Type A/B VGA Card(Type A or B, Max 75W)
5. 1* SATA III (6Gb/s) & M.2 (M key 2280)
6. 1* M.2 E key Support CNVi, 1* M.2 B key Support 3G/4G Module
7. 2* RS232 (COM1/2 Support 5V/12V TTL), 4* USB3.1, 4* USB2.0, 1* GbE
8. 4* HDMI, 2* DP, 1* eDP (By MXM)
9. 12~36V DC-in




External I/O

Rear

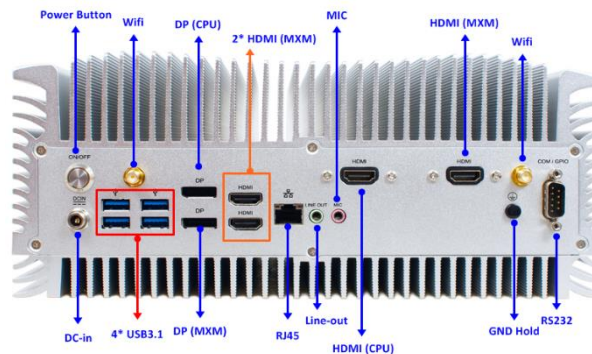

Mechanical Drawings (Unit = mm)

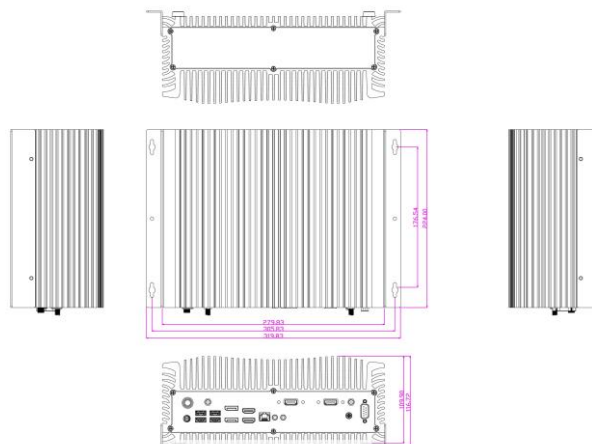

Specifications

| | | | |
|-----------------------|--|---------------------------|---|
| M/B Model | JNC9AMXM-H310 | Part No | HBJC909C9A |
| BIOS | AMI 128MB SMT Flash ROM | CPU/Chipset | <ul style="list-style-type: none"> Intel® LGA1151 Socket Core I3,I5,I7 Pentium Processor (Max 35W) Intel® Coffee Lake-S H310 Chip |
| Memory | 2* DDR42133MHz up to 32GB | Network | 1 * Intel® I219LM GbE |
| Storage | <ul style="list-style-type: none"> 1* 2.5" SATA 6Gb/s internal drive bay (only support 2.5" HDD with a height ≤ 10mm) 1* M.2 M Key Socket (2280, Support NVMe) | Expansion | N/A |
| Rear Panel I/O | <ul style="list-style-type: none"> 4* USB3.1 2* DP (Up: DP By CPU, Bottom: DP By MXM VGA Card) 4* HDMI (2* EXT HDMI By MXM, INT HDMI2 BY MXM, INT HDMI1 By CPU) 1* RJ45 1* RS232 1* Line-out, MIC 1* DC Jack 1* Power Button | Internal Connector | <ul style="list-style-type: none"> 1* M.2 B Key Socket for 3G/4G Module 1* M.2 E Key Socket for CNVi or PCI-E/USB WIFI/BT |
| Compliance | CE, FCC, RoHS, ErP Ready (Option) | Power Source | DC 12~36V input |
| Temperature | <ul style="list-style-type: none"> Operating Temperature: -10 ~ 50° C Storage Temperature: -20 ~ 60° C | Dimensions | 279.8 (W) x 224.0 (D) x 115.9 (H) mm |
| OS Support | Windows 10, Linux | Warranty | 2 Years limited warranty |

* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.

Accessories

| Parts Number | Description | Parts Number | Description |
|-----------------------------------|------------------------|-------------------|------------------|
| ----- | HBJC909C9A | J05-ANT-GX57245-F | L-Antenna2G4/5G |
| L01AS043-F | Adapter 19V/180W/9.47A | HCS9XXMWM01B-1F | JC909_Wall mount |
| Change according to shipping area | Power cord | | |