

WNAI-E800S

Industrial Edge AI Computer with Intel® Raptor Lake-S processor



KEY FEATURES

- Supports Intel® 12/14th generation Raptor Lake S processor (LGA 1700)
- Supports single NVIDIA RTX PRO 6000 Blackwell/RTX5080 GPU
- Up to 2 x 262pin SODIMM DDR up to 96GB(48GB per Slot)
- Supports 6 x USB3.2, 3 x Intel 2.5 Gigabit LAN
- Supports Two display, 1 x HDMI 2.0, 1 x DP 1.4a
- Supports Intel® vPro
- Rugged Design, -25°C to 60°C operation

INTRODUCTION

The WNAI-E800S is a highly reliable edge AI computing system powered by Intel® 12th/14th Gen processors and top-tier NVIDIA GPUs (up to RTX PRO 6000 Blackwell or RTX 5080) to deliver exceptional AI inference performance. Equipped with up to 96GB of memory, triple 2.5GbE LAN ports, and comprehensive I/O interfaces, it is perfectly suited for demanding industrial AI applications. Furthermore, its rugged design ensures stable operation even in harsh environments with extreme temperatures ranging from -25°C to 60°C.

SPECIFICATIONS

System Specification

Processor	Intel® Core™ i7-14700T(up to 5.2GHz) (Default) Intel® Core™ i9-14900T(up to 5.5GHz) (Optional)	Chipset	Intel® R680E
Memory	2 x non-ECC SO-DIMM RAM, up to 96GB (48GB per DIMM)	Storage	128GB SSD(Default) (Default) 256GB SSD (Optional) 512GB SSD (Optional) 1TB (Optional) 2TB (Optional) 4TB 2 x SATA III for 2.5" SSD/HDD up to 2TB(RAID support) (Optional)
Ethernet controller	3 x Intel® 2.5 Gigabit Ethernet Controller	Security	TPM 2.0
Operating System	Windows 10 IoT Enterprise (64 bit) (Optional) Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 24.04(Do not support Wake on Touch) (Optional)	WLAN	Support (Optional)
BT	Support (Optional)	Graphic Card	Supports high-end NVIDIA RTX GPUs (e.g., GeForce RTX 5080 or RTX PRO 6000 Blackwell) (Optional) Other GPU options are available upon request. (Optional)

Mechanical

Dimension	360 x 170 x 196 mm	Weight	7.85kg
Mounting	Desk mount	Enclosure	Metal Housing
Cooling System	Fan Design		

Environment

Operating Humidity 10% to 90% RH, Non-Condensing
 Storage Temperature -40°C to 70°C

Operating Temperature -20°C to 60°C

Certification

Certification CE, FCC

IO Ports

Power Input	3+4 pin terminal block for DC 8-48V input. Max. to 1000W	USB Port	6 x USB3.2 Gen 2x1 (Type-A)
Serial Port	2 x RS232/422/485 (Default RS232)	SIM Card Slot	1 x nano SIM slot
Video	1 x DP1.4a DP++ , Max resolution up to 4096x2160@60Hz (Default) 1 x HDMI 2.0b , Max resolution up to 4096x2160@60Hz (Optional)	Audio	Mic in Line out
Expansion Port	1 x M.2 2230 E-Key Slot (for Wi-Fi module) 1 x M.2 3042/3052 B-Key Slot (for WWAN module) 1 x PCIe x16 slot, 16-lanes, for NVIDIA® RTX™ GPU cards 1 x PCIe x8 slot, 8-lanes (Only available when PCIe x16 signal is not present) 2 x PCIe x8 slot, 4-lanes	LAN	3 x 2.5 Giga LAN RJ45 Connector


Control

Button 1 x Power Button with LED Indicator
1 x Clear CMOS Button

Accessory

Accessory Power Cord

DIMENSIONS UNIT:MM

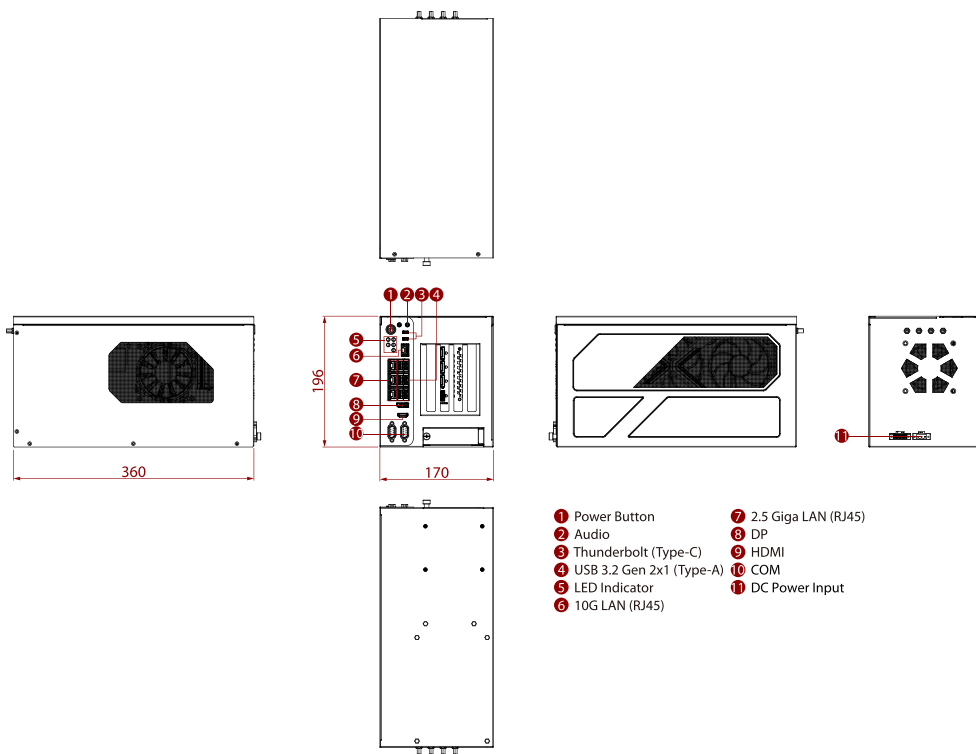

NOTE

1. This is a simplified drawing, and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.